


3-WAY MUELLER SUPER CENTURION 250 FIRE HYDRANT NO. A-423
 6-294 THREADS ON 2-1/2" NOZZLES, 85-367 THREADS ON 4-1/2" PUMPER NOZZLE
 OPEN CLOCKWISE (RIGHT) WITH 1-1/2" PENTAGON OPERATING NUT
 5-1/4" VALVE OPENING, 6" MECHANICAL JOINT SHOE
 HYDRANT BARREL PAINTED SAFETY RED, BONNET AND ALL NOZZLE CAPS PAINTED SAFETY YELLOW
 ALL BOLTS AND NUTS ABOVE AND BELOW GRADE SHALL BE 304 STAINLESS STEEL
 4'-6" MINIMUM BURY

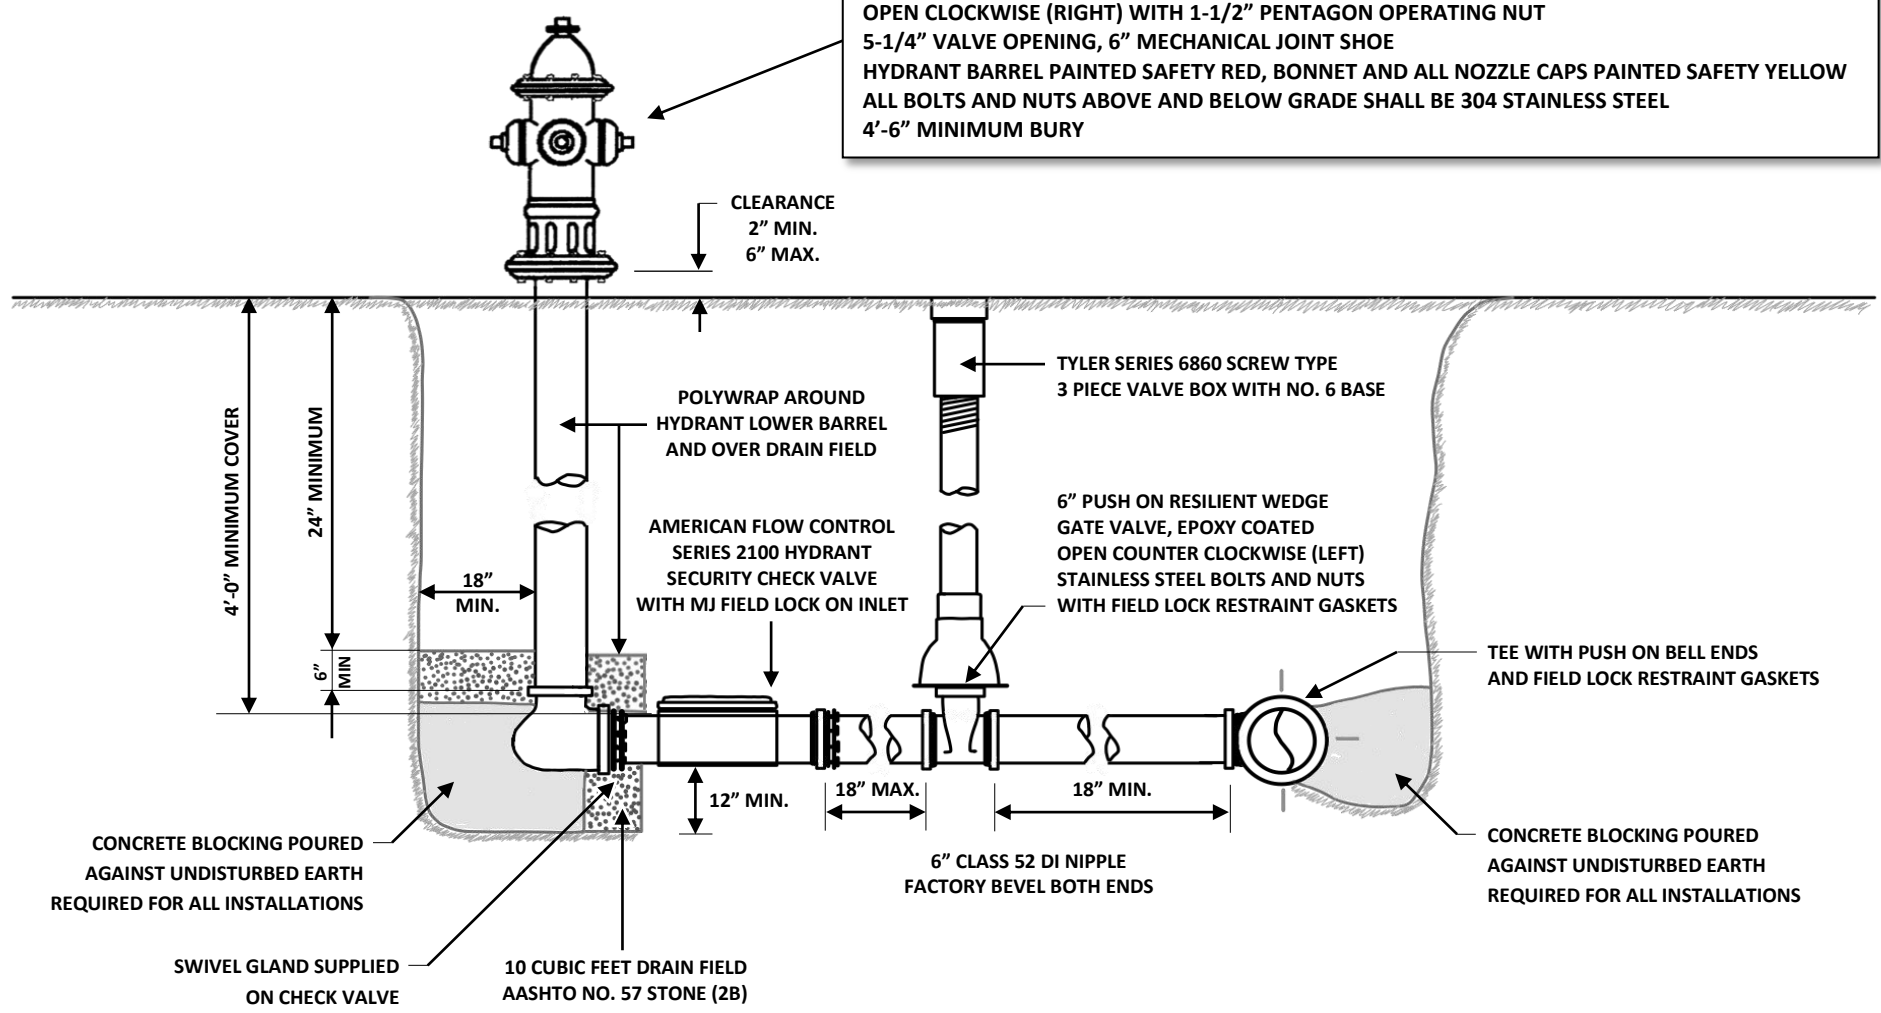

TYPICAL FIRE HYDRANT INSTALLATION