


3-WAY MUELLER SUPER CENTURION 250 FIRE HYDRANT NO. A-423
6-294 THREADS ON 2-1/2" NOZZLES, 85-367 THREADS ON 4-1/2" PUMPER NOZZLE
OPEN CLOCKWISE (RIGHT) WITH 1-1/2" PENTAGON OPERATING NUT
5-1/4" VALVE OPENING, 6" MECHANICAL JOINT SHOE
HYDRANT BARREL PAINTED SAFETY RED, BONNET AND ALL NOZZLE CAPS PAINTED SAFETY YELLOW
ALL BOLTS AND NUTS SHALL BE 304 STAINLESS STEEL
4'-6" MINIMUM BURY

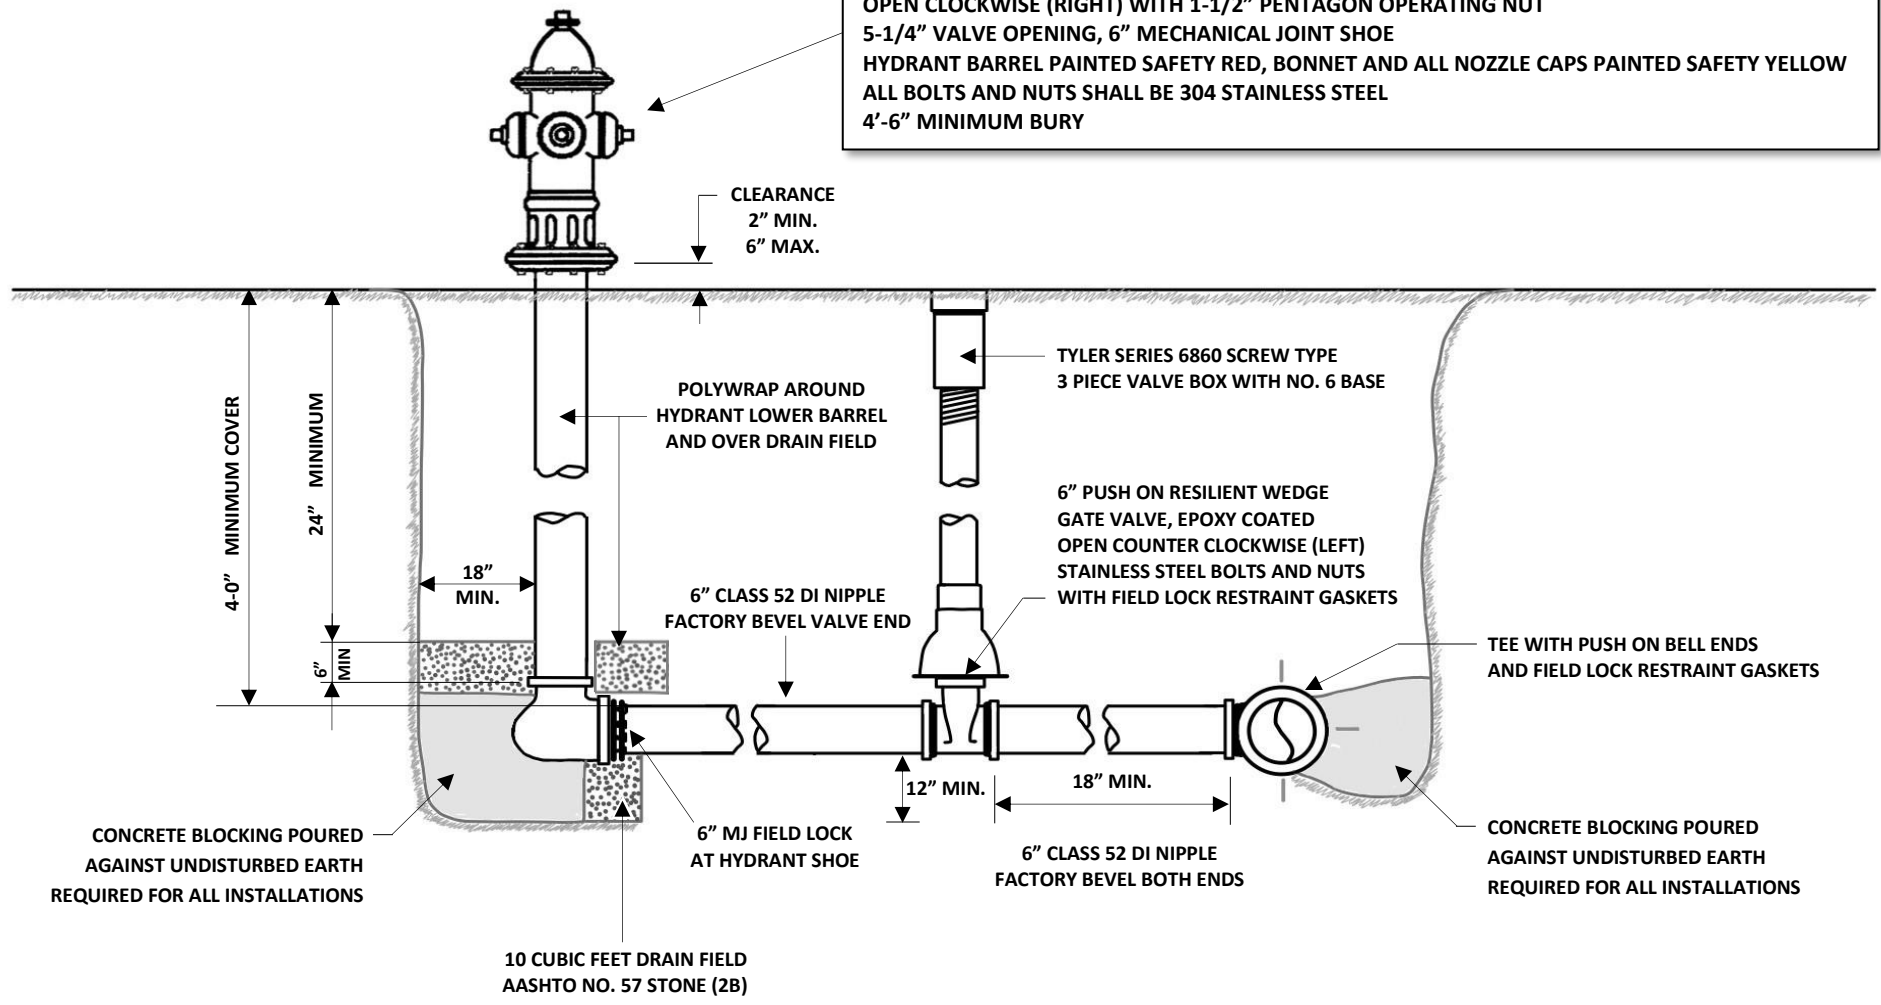

TYPICAL FIRE HYDRANT INSTALLATION